


Northfield 36" Gate & Riser **BANDSAW**

FOR HIGH TOOL VELOCITY BANDSAWING

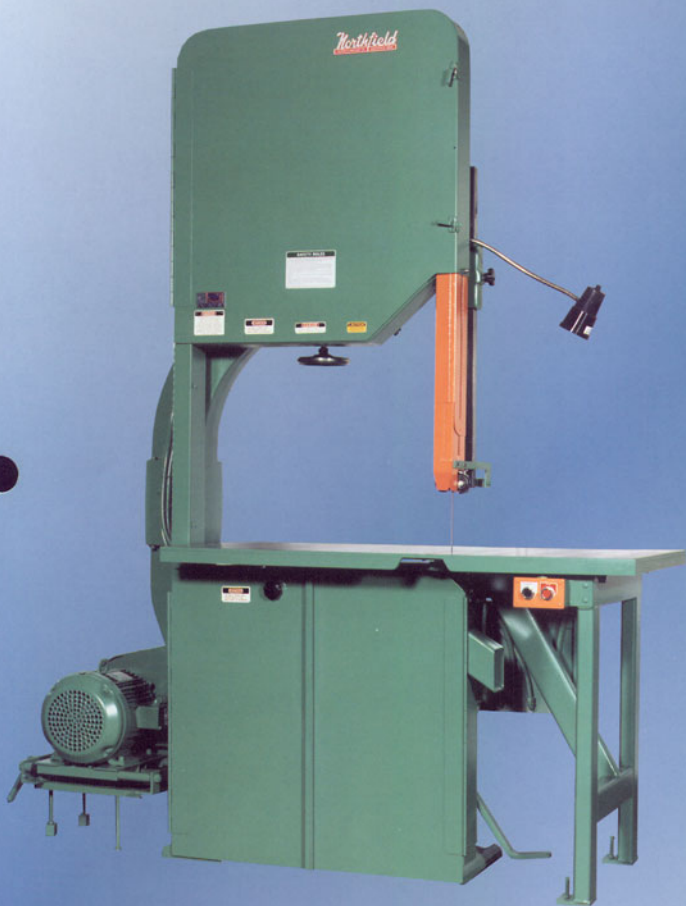

36" DELUXE BANDSAW BELT DRIVE
WITH 3 TO 1 VS DRIVE, 3' X 5' STEEL
TABLE & NEMA 12 ELECTRICS

ADVANCED DESIGN

NORTHFIELD Bandsaws undergo a constant process of testing and refinement to maintain the highest standards of precision, speed, dependability, appearance and value.

QUALITY MANUFACTURE

NORTHFIELD Bandsaws are built to exacting quality standards in every detail. They are solid, smooth-running machines. Each Bandsaw is electronically balanced for vibration-free performance.

HEAVY DUTY FRAME

High strength cast iron frames with wide, ribbed feet give a solid stance, and absorb vibration.

HIGH SPEED SAWING of non-ferrous and non-metallic materials 3,000 - 8,000 FPM.

FRICITION SAWING of ferrous materials less than 1" thick 10,000 - 15,000 FPM.

***Advanced Bandsaws for
Removal of Gates & Risers and
Other Trimming Operations in
Ferrous & Non-Ferrous Metals***



Rear view showing upper wheel auto brake & NEMA 12 electrical enclosure with fused disconnect.

Specifications Standard ... Deluxe

Wheel Face	2"	
Table Size - cast iron	30" x 36"	37" x 37"
Front Edge of Table		
to Teeth of 3/8" Blade	12"	13"
Cap Under Guide	22"	30"
Table Tilt to Right	45°	
Table Tilt to Left	5°	
Horizontal Cap	35-1/2"	
Table Height	42"	
Wheels	Carter Loc-On Steel Disc	
	Demountable Tire	
Brakes	Lower Wheel	Lower Wheel
	Foot Operated	Foot Operated & Upper Wheel Automatic
Floor Space	50" x 60"	50" x 63"
Domestic Shipping Wt.	2700 lbs.	3000 lbs.
Export Shipping Wt.	3300 lbs.	3600 lbs.
Cubic Export Crate Size	165 cu. ft.	180 cu. ft.
Wheel Circumference	36" Dia. = 9.424 ft.	
Dust Outlet	4.5W x 5.5H use 5" pipe	
Machine requires approx. 600 CFM air flow for dust collection		

To calculate blade speed in FPM:

Multiply RPM x 9.424'

1200 RPM x 9.424 = 11,308 FPM

900 RPM x 9.424 = 8481 FPM

300 RPM x 9.424 = 2827 FPM

DRIVE PACKAGES - All motors TEFC

Belt Driven Single Speed

3, 5, 7-1/2, 10 & 15 HP - Minimum 300 RPM, Maximum 1500 RPM
Speeds lower than 300 RPM contact factory

3:1 Variable Speed Drive Assembly

3, 5, 7-1/2, 10 & 15 HP available in the following ratios:
200 to 600 RPM
300 to 900 RPM
400 to 1200 RPM
500 to 1500 RPM

6:1 Variable Speed Drive Assembly

3, 5, 7-1/2, 10 & 15 HP available in any 6:1 range below 1500 RPM

40:1 Variable Speed Drive Assembly

3 & 5 HP available in any 40:1 range below 1200 RPM

Extras for all 36" Band Saws

- 3' x 5' steel table (non-tilting)
- Work light, 110V, plugs into customers' 110V receptacle, or work light 110V - 100W using transformer in starting box.
- Powered guide post
- Rip fence, single face (for right side of blade)
- Large cross cut gauge with dovetail slot - custom tables only
- Rip fence, double face for use on both sides of blade
- Switch for stopping power on application of foot brake (furnished on Deluxe 36")
- Blade welders
- Air nozzle assembly, connects to customer's air line
- Paddock Guides, Wright Guides, Guideall 400 Guides
- Large rolling table, 48" cut-off x 50" wide, solid cast iron, non-tilting table with steel 50" auxiliary table non-rolling.
- Power feed attachments for rolling tables
- Left-hand machines
- 48", 36", 30" and 24" (standard) under guides
- Upper wheel automatic synchronized safety brake includes automatic tension control
- Lower wheel automatic synchronized safety brake

Northfield

FOUNDRY & MACHINE CO.

320 North Water Street, P.O. Box 140
Northfield, Minnesota 55057 USA

PHONE: 507-645-5641
FAX: 507-645-4005



Printed in USA 12-97