
## Mothfield BAND RESAW FEEDER MODEL CKRF-32

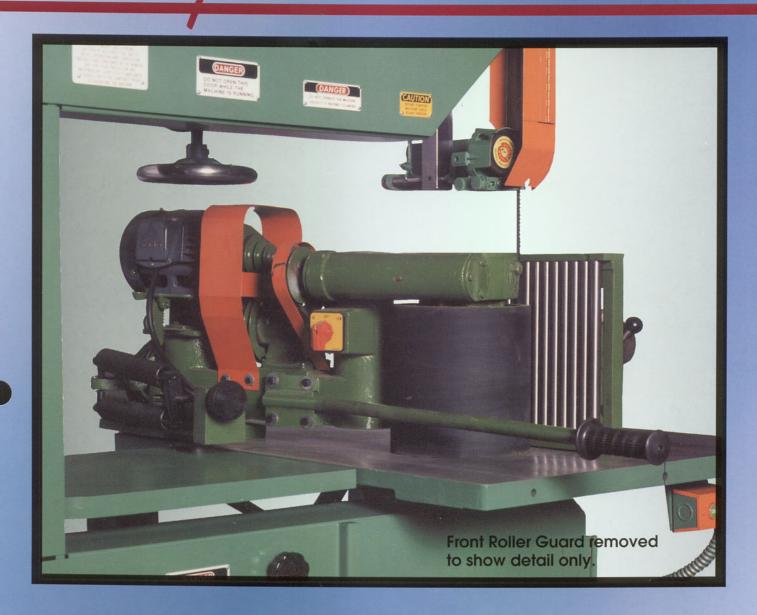

Designed for the manufacturer who requires the versatility of using their bandsaw as a standard saw or, when required, as a resaw. This unit is easily

mounted on machines 32" and larger. Its ten feed speeds (up to 90 FPM) offer increased productivity at a very economical price.

The CKRF-32 is a contact drum feeder powered by a worm and wheel type gear drive. The contact point of the feed drum is positioned slightly ahead of the blade teeth, preventing the kerf from being collapsed onto the blade. This minimizes blade overheating and premature dulling, resulting in straighter resaw cuts.

The CKRF-32 is a cost effective approach to the problem of the manufacturer who requires resawing capability, but cannot justify the expense of a specialized band resaw machine.





Detail of Roller Fence and rubber covered feed drum.

A toothed roll is available as an option.

## **Specifications**

Motor (2-speed)	1/2 hp, 3 phase, 220
	or 440 volt, 60 hz TEFC
Feed Speed (10 steps)	6 to 90 FPM
Feed Roller Height (standard)	9-1/4"
Fence Height (Roller type)	12-1/2"
Feed Roller Diameter	8-1/2"
Lateral Fence Adjustment (from blade)	0 to 4"
Lateral Feed Unit Adjustment (from blade)	0 to 10"
Shipping Weight	300 lbs.
Manufactured in Talwan	

## Standard Equipment

One Rubber Covered Roller
One Roller-type Fence
Feed Unit
Instruction Booklet

Please specify voltage requirement (220 or 440) when ordering.



MACHINERY BUILDERS, INC.

320 Water Street North P.O. Box 140 Northfield, MN 55057

Phone: (507) 645-5641 Fax: (507) 645-4005

